Supelco®

www.sigmaaldrich.com

Certificate of Analysis – Certified Reference Material

Citric acid Monohydrate



Product no.:	PHR2903-200MG
Lot no.:	LRAC6729
Description of CRM:	White Solid
Expiry date:	31 October 2025
Storage:	Room Temperature
Certificate version:	LRAC6729.01 (*Note: Certificates may be updated due to Pharmacopeial Lot Changes or the availability of new data. Check our website at: www.sigma-aldrich.com for the most current version.)*
Chemical formula:	$C_6H_8O_7 \cdot H_2O$
Molecular mass:	210.14
CAS No.:	5949-29-1

Analyte	Certified Purity ± associated uncertainty *U*, $U=k \cdot u$ (*k*=) (Mass Balance/ basis)
Citric Acid Monohydrate	**99.9 % Ucrm = ± 0.5 %, k = 2.0 (anhydrous basis)**

Metrological traceability:	Traceable to the SI and higher order standards from NIST through an unbroken chain of comparisons. Additional traceability to Primary Standards is established through comparative assay determinations. See "Details on metrological traceability" on page 2.
Measurement method:	Where applicable, the certified value is based on a purity determination by mass balance. See "Certification process details" on page 3.
Intended use:	Intended for R&D and Analytical Use only. Not for drug, household or other uses
Minimum sample size:	10 mg
Instructions for handling and correct use:	Determine the water content by KF TOU before use and use on the anhydrous basis. The internal pressure of the container may be slightly different from the atmospheric pressure at the user`s location. Open slowly and carefully to avoid dispersion of the material. Attachment of a 20 mm aluminum crimp seal recommended for unused portions.
Health and safety information:	All chemical reference materials should be considered potentially hazardous and should be used only by qualified laboratory personnel. Please refer to the Safety Data Sheet for detailed information about the nature of any hazard and appropriate precautions to be taken.
Accreditation:	Sigma-Aldrich RTC is accredited by the US accreditation authority ANAB as a registered reference material producer AR-1470 in accordance with ISO 17034.
Certificate issue date:	28 October 2021

ANAB ACCREDITED ISO 17034 REFERENCE MATERIAL

ISO 17034
AR-1470

[Andy Ommen; Quality Control]

Shawn Stetler- QA Manager

Sigma-Aldrich RTC, 2931 Soldier Springs Rd. Laramie, WY 82070, USA;
Tel. 1 307-742-5452; Fax 1 307-855-831-9211; www.sigmaaldrich.com
Sigma-Aldrich RTC is a subsidiary of Merck KGaA, Darmstadt, Germany.

Packaging:	200 mg in amber vial
Details on metrological traceability:	This standard has been gravimetrically prepared using balances that have been fully qualified and calibrated to ISO 17025 requirements. All calibrations utilize NIST traceable weights which are calibrated externally by a qualified ISO 17025 accredited calibration laboratory to NIST standards. Qualification of each balance includes the assignment of a minimum weighing by a qualified and ISO 17025 accredited calibration vendor taking into consideration the balance and installed environmental conditions to ensure compliance with USP tolerances of NMT 0.10% relative error. Fill volume to predetermined specifications is gravimetrically verified throughout the dispensing process using qualified and calibrated balances. Further traceability to a corresponding Primary Standard may be achieved through a direct comparison assay. Where a Primary Standard is available, the assay value will be included in the specified section of the COA.
Associated uncertainty:	Uncertainty values in this document are expressed as Expanded Uncertainty (U_{CRM}) corresponding to the 95% confidence interval. U_{CRM} is derived from the combined standard uncertainty multiplied by the coverage factor k, which is obtained from a t-distribution and degrees of freedom. The components of combined standard uncertainty include the uncertainties due to characterization, homogeneity, long term stability, and short term stability (transport). The components due to stability are generally considered to be negligible unless otherwise indicated by stability studies.

Traceability Assay:

Comparative assay demonstrates direct traceability to Pharmacopeial Standards

ANHYDROUS ASSAY vs. USP REFERENCE STANDARD (1134368 as is basis)

ASSAY VALUE	**vs. USP LOT**
101.6 %	**R062M0** Labeled Content = 0.999 mg/mg, as is basis

ANHYDROUS ASSAY vs. EP CRS (C2219000 as is basis)

ASSAY VALUE	**vs. EP BATCH**
101.6%	**2.0** Labeled Content = None Assigned Content = 93.5 %, as is basis *

*The assigned content of the EP CRS was determined by assay against the USP Reference Standard

Method: HPIC (ref.: Citric Acid, Current Compendial Monographs)

System: Thermoscientific Dionex ICS-6000 HPIC (High Performance Ion Chromatography) System
Column: Dionex IonPac AG11-HC 50 mm x 4 mm (Guard Column), Dionex IonPac AS11-HC 250 mm x 4 mm (Column)
Mobile Phase: 40 mM Potassium Hydroxide (Eluent Generator)
Flow Rate: 1.500 mL/min
Column Temperature: 30.0 °C
Injection Volume: 25.0 µL
Detector: Conductivity Detector, cell temperature set at 35°C, electrochemical suppression using dynamic setting

Representative Chromatogram from Lot: LRAC6729 Analysis

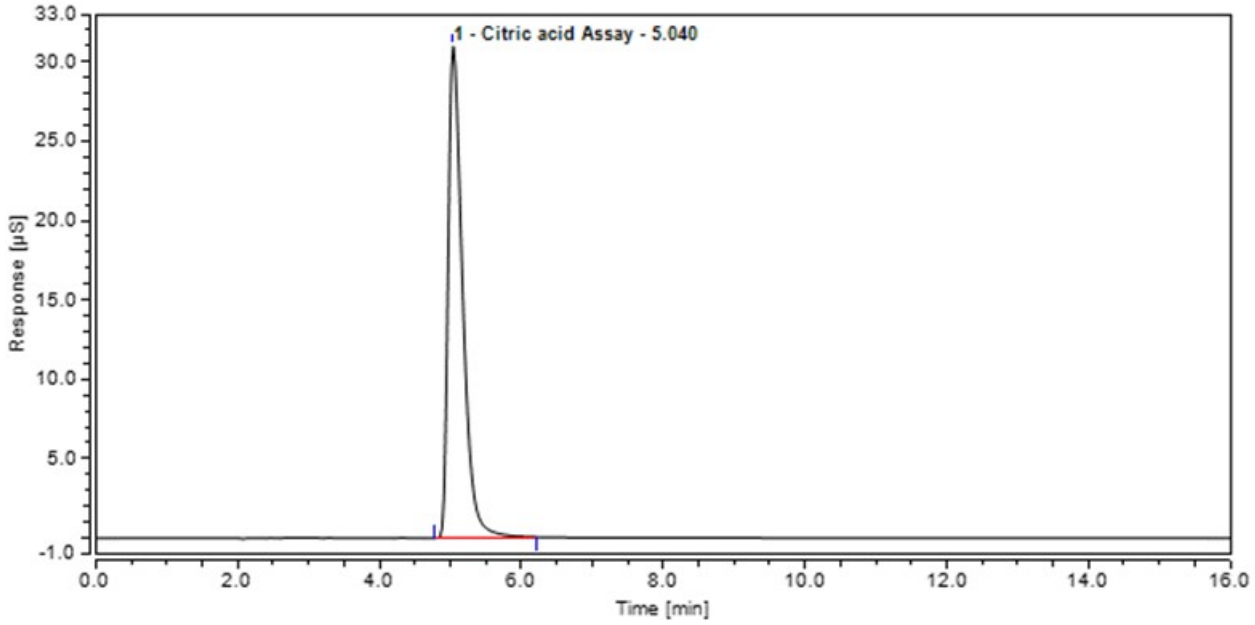

ASSAY BY TITRATION

Method: Titrate with 1 N sodium hydroxide VS

Mean of nine measurements: **99.96 %,** U_{crm} = ± 0.7 %, k = 2.2

Certification process details:

The certified purity is determined by mass balance and calculated as

$$\%\ Purity = (\mathbf{100 - ROI - LOD - H_2O - RS}) * (\frac{\mathbf{100 - TCI}}{\mathbf{100}})$$

- TCI = Total Chromatographic Impurities
- LOD = Loss on Drying
- H_2O = Water content determined by Karl Fischer analysis
- ROI = Residue on Ignition
- RS = Residual Solvents

Methods for impurity determination may be added or deleted as required. The following techniques are applied:

CHROMATOGRAPHIC IMPURITY ANALYSIS

METHOD: HPIC (ref.: Citric Acid, Current Compendial Monographs)

Impurities Detected:

Impurity 1: 0.0080 %

Total Impurities: **0.0080 %**

Representative Chromatogram from Lot: LRAC6729 Impurities Analysis

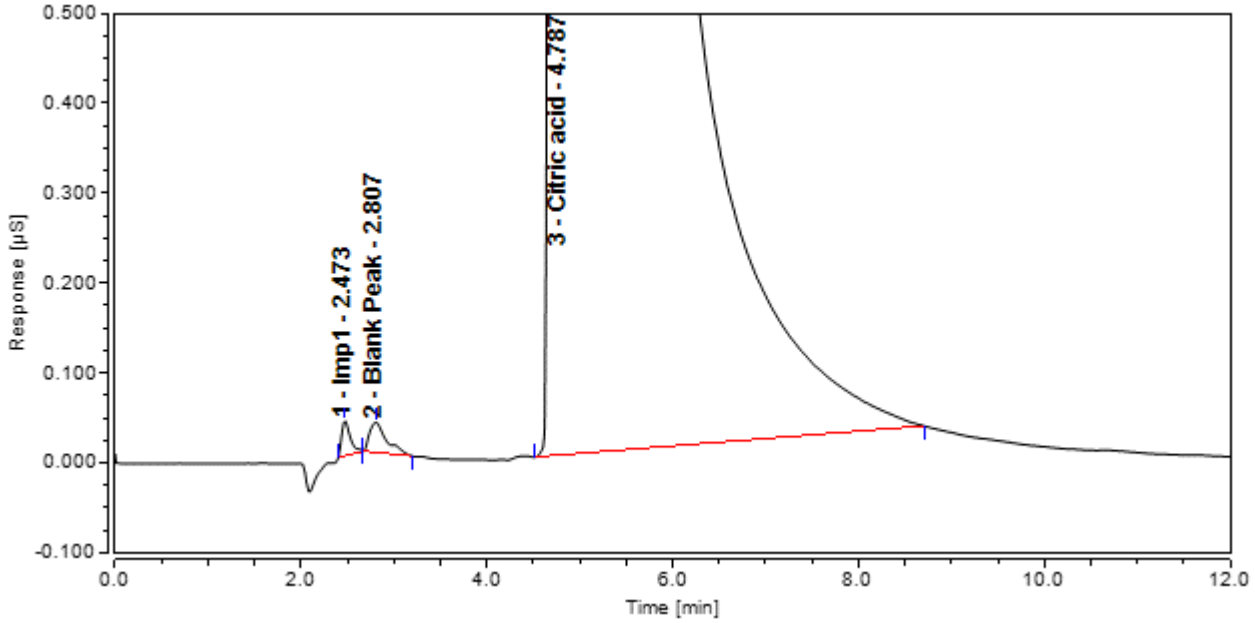

RESIDUAL SOLVENTS
Method: GC-MS Headspace (ref.: Adapted from Residual Solvents USP <467>)
Column: SPB-624, 30 m x 0.25 mm x 1.4 µm
Carrier gas: He
Flow: 1.0 mL/min
Split Ratio: 5:1
Injection/Temperature: 1 mL/180 °C
Temperature Program: 40 °C for 5 min, 8 °C/min to 200 °C, hold 5 min

Solvents Detected: **None**

WATER DETERMINATION
Method: Karl Fischer (ref.: Current Compendial Monographs)
Mean of three measurements, Water Content = **8.28 %**

RESIDUE ANALYSIS
Method: Sulfated Ash (ref.: Current Compendial Monographs)
Sample Size: ~ 50 mg
Mean of three measurements, Residue = **0.075 %**

CERTIFIED PURITY BY MASS BALANCE

99.9 % U_{crm} = ± 0.5 %, k = 2.0
(anhydrous basis)

Homogeneity assessment:

Homogeneity was assessed in accordance with ISO Guide 35. Completed units were sampled using a random stratified sampling protocol. The results of chemical analysis were then compared by Single Factor Analysis of Variance (ANOVA). The uncertainty due to homogeneity was derived from the ANOVA. Heterogeneity was not detected under the conditions of the ANOVA.

Analytical method: HPIC

Sample size: 10 mg

Stability assessment:

Significance of the stability assessment will be demonstrated if the analytical result of the study and the range of values represented by the Expanded Uncertainty do not overlap the result of the original assay and the range of its values represented by the Expanded Uncertainty. The method employed will usually be the same method used to characterize the assay value in the initial evaluation.

Long Term Stability Evaluation - An assessment, or re-test, versus a Compendial Reference Standard may be scheduled, within the 3 year anniversary date of a release of a Secondary Standard. The re-test interval will be determined on a case-by-case basis. Short Term Stability Study - It is useful to assess stability under reasonably anticipated, short term transport conditions by simulating exposure of the product to humidity and temperature stress. This type of study is conducted under controlled conditions of elevated temperature and humidity.

Identification Test:

INFRARED SPECTROPHOTOMETRY (Comparative identification analysis demonstrates direct traceability to Pharmacopeial standards)

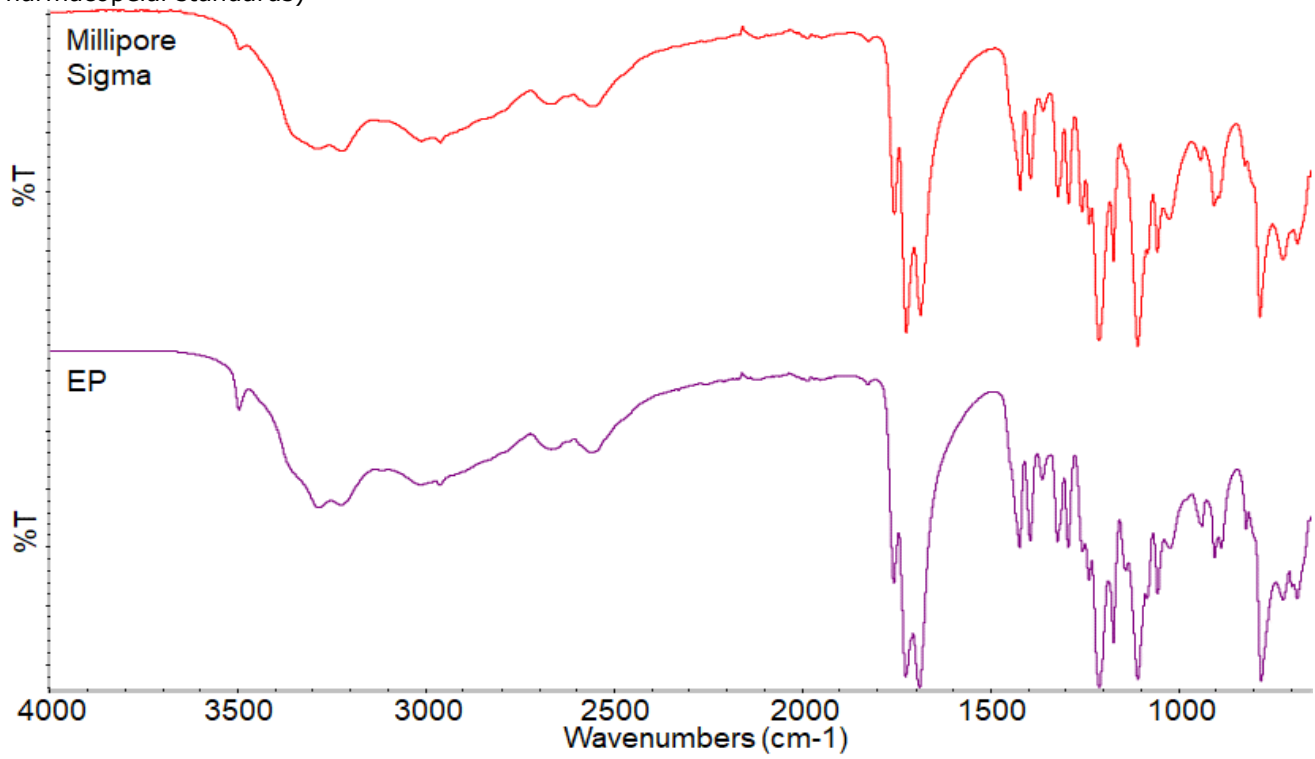

MilliporeSigma Lot: LRAC6729 vs. EP Batch: 2.0

Indicative Values:

MASS SPECTRUM

Method: HR-QTOF; 4.0 kV ESI+; temperature: 325 °C

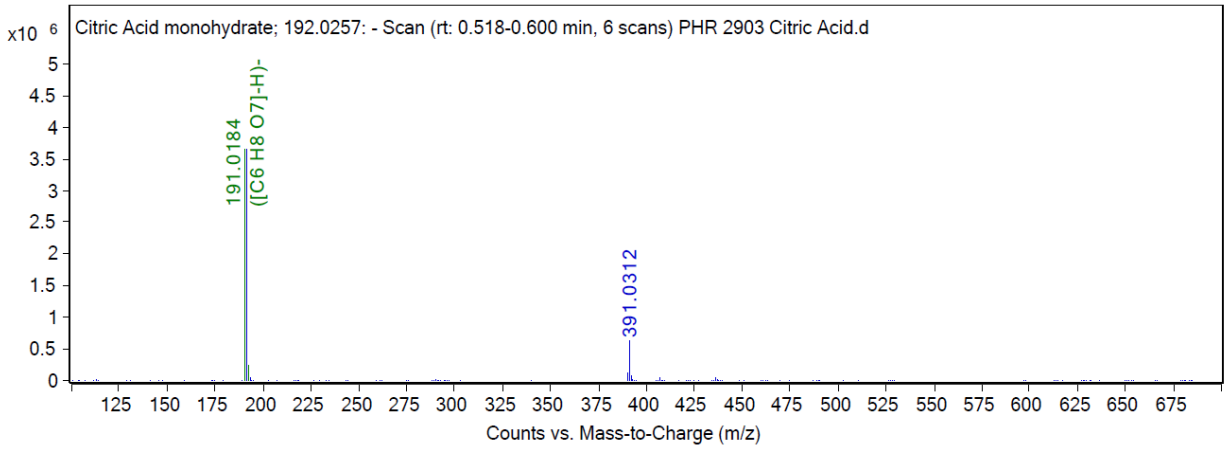

Theoretical value: 191.0192 m/z

The signal of the MS spectrum is consistent with the theoretical value and its interpretation is consistent with the structural formula.

Certificate of analysis revision history:

Certificate version	Date	Reason for version
LRAC6729.01	28 October 2021	Original Release

Disclaimer:

The purchaser is required to determine the suitability of this product for any particular application. Sigma-Aldrich RTC makes no warranty of any kind, express or implied, other than its products meet all quality control standards set by Sigma-Aldrich RTC. We do not guarantee that the product can be used for any particular application.